

U.S. installation guideline

gs3






Dimensions		Water	
Height	14" (15" for MP)	Specifications for plumb-in. Disregard if using the internal water reservoir.	
Width	16"	Water Flow Rate	2GPM
Depth	21"	Dynamic Water Pressure †	45PSI
Working Height°	10.25"	Min. Pipe Size Diameter*	3/8"
Weights		Water Connection*	3/8" male comp.
Shipping Weight	104 lbs	Water Quality	Contact us for a free water test kit. See water specifications.
Operating Weight	84 lbs	Drainage	
Power		Max. Dist.*	5 ft
Voltage/Phase/Cycle	120 VAC 1Φ 60Hz	Drain Slope*‡	Min. 1/4" per foot
Wattage	1620	Counter Hole Diameter	2"
Full Load Amp Draw	20 (14.6 in half power mode)		
Max. Dist. from Outlet*	5'		
NEMA Plug and Outlet*	5-15P, plug is included		


* suggested | † regulate as needed | ‡ This machine must be installed in accordance with the applicable federal, state and local plumbing codes ° Height from the base of the machine to the group head





top view

- 1. center line of the machine
- 2. position of the power cord
- 3. suggested diameter of counter hole: 2.5"
- 4. position of the drain tube
- 5. position of the water inlet hose
- 6. width of legs per model
- $\otimes\;$ machine leg location

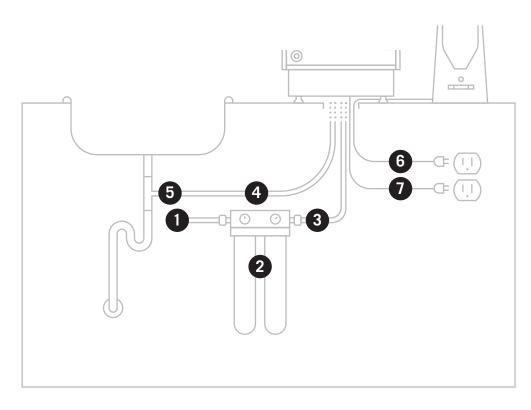

water specifications

La Marzocco recommends that your filtration system produces water with the following properties:

T.D.S. Total Hardness Total Iron Free Chlorine Total Chlorine 90—150ppm 70—100 ppm 0—0.02ppm 0—0.05ppm 0—0.1ppm

6.5—8	
40—80ppm	
0—30ppm	
45—80 PSI	
2 GPM or 8 LPM	

front view

Specifications for plumb-in. Disregard if using the internal water reservoir.

- 1. 3/8" cold water supply
- 2. water filter required if plumbed (not provided),
 - see water specifications below.
- 3/8" BSPP cold water supply line suggested max. dist. from water supply 8'
- 4. 3/4" flexible drainline (min. 0.25"/1' slope)
- 5. sink drain above p-trap
- 6. 120V, 15amp electrical supply to grinder
- 7. 120V, electrical supply to espresso machine (plug included)